

SR

GEDA[®]
ORIGINAL

GD1500 Z/ZP
12-24m/min



GD1500 Z/ZP

Material Hoist / Transport Platform

Hot-dip galvanization


The dip process creates a long-lasting, reliable and resistant corrosion protection coat in the form of a zinc alloy layer.

Galvanization and powder coating/lacquer

The use of pre-galvanized sheet metal guarantees high corrosion protection. A subsequent application of the powder coating or lacquer creates an individual colour scheme.

Electro galvanization

Corrosion protection due to electro galvanization guarantees perfect fitting of the components.

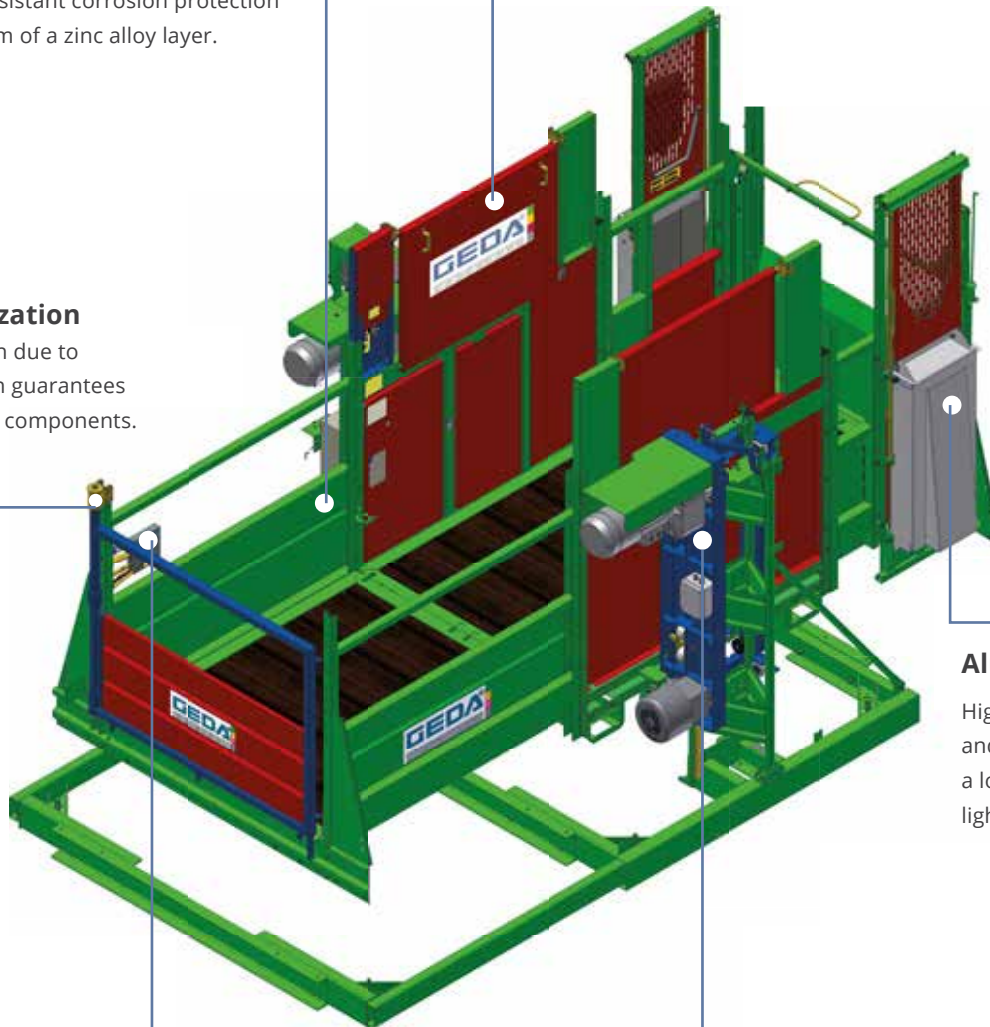

V2A (Stainless steel)

The high chromium and nickel content of V2A ensures high resistance to oxidising metals making it corrosion-resistant.

Aluminium


High corrosion resistance and optimum stability with a low weight distinguish this light metal.

Cathodic dip paint and powder coatings

In cathodic dip-paint coating the workpiece is immersed in a dip and coated with a very fine primer using electric current. A powder coating is then applied. The main benefits are the optimum coating of cavities, a high level of quality and cost-effectiveness.

GD1500 Z/ZP

Material Hoist / Transport Platform

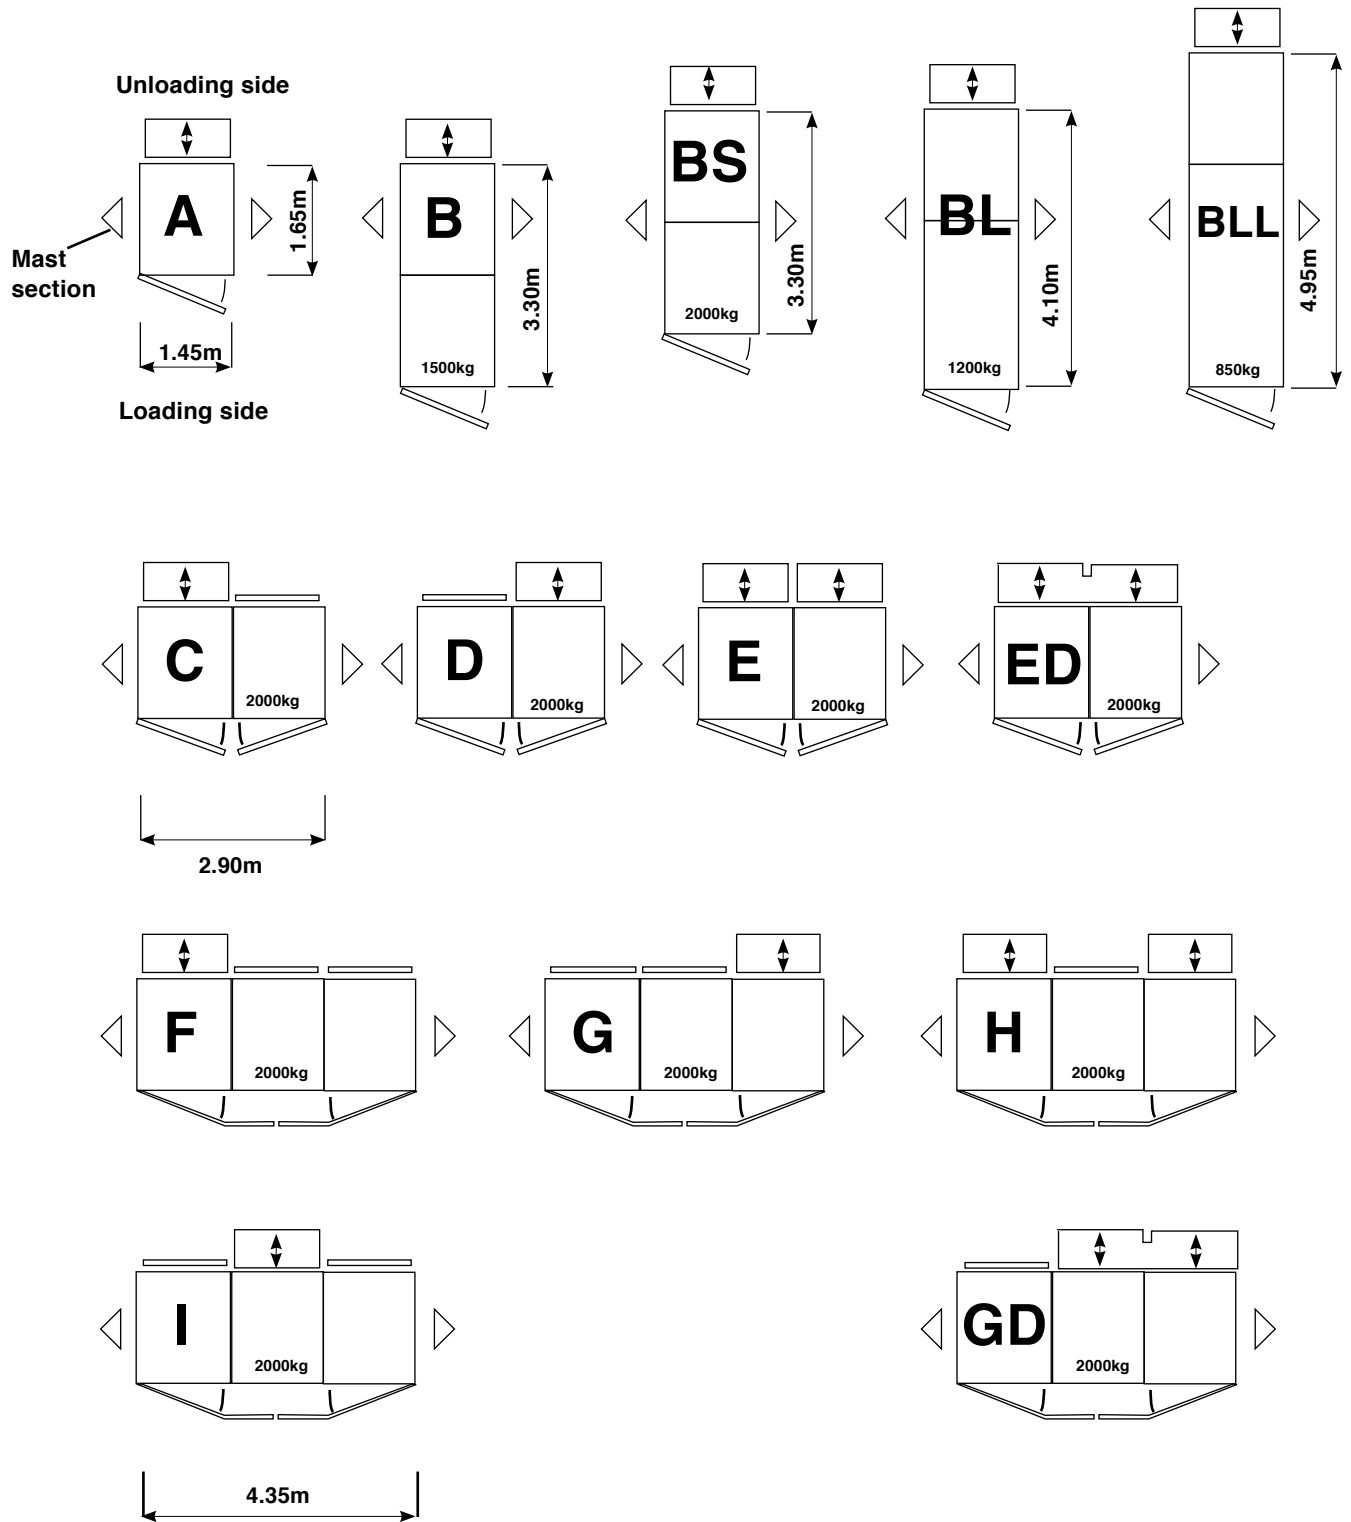

Technical Data - GD1500 Z/ZP

CAPACITY

| | |
|------------------------|---------------|
| Payload | 2000kg |
| Lifting Speed | 12 - 24 m/min |
| Counter Weight | No |
| Maximum Lifting Height | 100m |

ELECTRICAL DATA

| | |
|-------------------------|---------------------|
| Motor | 2 x 3.0/6.1kw / 32A |
| Power Supply | 400V - 50hz, 3p |
| 230 V power on platform | Standard, included |
| Overload device | Standard, included |
| Automatic lubrication | Standard, included |

DIMENSIONS & WEIGHT

| | |
|----------------------------------|--------------------|
| Transport dimensions (L X W x H) | |
| Platform A | 1.65 x 2.5 x 2.5m |
| Platform B, BS | 3.35 x 2.5 x 2.5m |
| Platform BL | 4.15 x 2.5 x 2.5m |
| Platform BLL | 4.95 x 2.5 x 2.5m |
| Platform C, D | 1.65 x 3.94 x 2.5m |
| Platform E, ED | 1.65 x 3.94 x 2.5m |
| Platform F, G, I | 1.65 x 5.4 x 2.5m |
| Platform GD, H | 1.65 x 5.4 x 2.5m |
| Length of Uni mast section | 1.5m |
| Weight of mast section - Single | 44.4 kg |

HOIST CONTROLS

| | |
|-------------------------------------|--------------------|
| Manual controls / Erection controls | Standard, Included |
| Drop test controls | Standard, Included |
| Programmable landings | Optional |
| Hoist calling system | Optional |

GENERAL

| | |
|------------------------------------|--|
| Finishing Cabin / Ground Enclosure | Galvanised / Powder Coated |
| Company Logo & Colour | Optional |
| Ground Enclosure | (Optional) |
| Cable System | Basket |
| Erection Jib | Optional |
| Norms & Regulations | European Machine Directive CE 2006/42 EC Australian Standards |

*Data based on a standard configuration

GEDA products have been sold in 80 different countries around the world. In addition to our subsidiaries in Germany, Russia, the USA and Turkey, our comprehensive dealer network plays a huge part in our worldwide success. GEDA is represented both in Europe and in the Pacific region through skilled professional dealers who are responsible both for sales and service in their local areas.

21-29 West Circuit,
Sunshine West,
3020 VIC, AUSTRALIA

P. +61 3 9312 6497
E. sales@scanrent.com.au
www.scanrent.com.au

