



GEDA®
ORIGINAL





- ▷ Innovations
- ▷ Know-how
- ▷ Up-to-date production technologies



GEDA®
ORIGINAL



GEDA®
World-wide competence

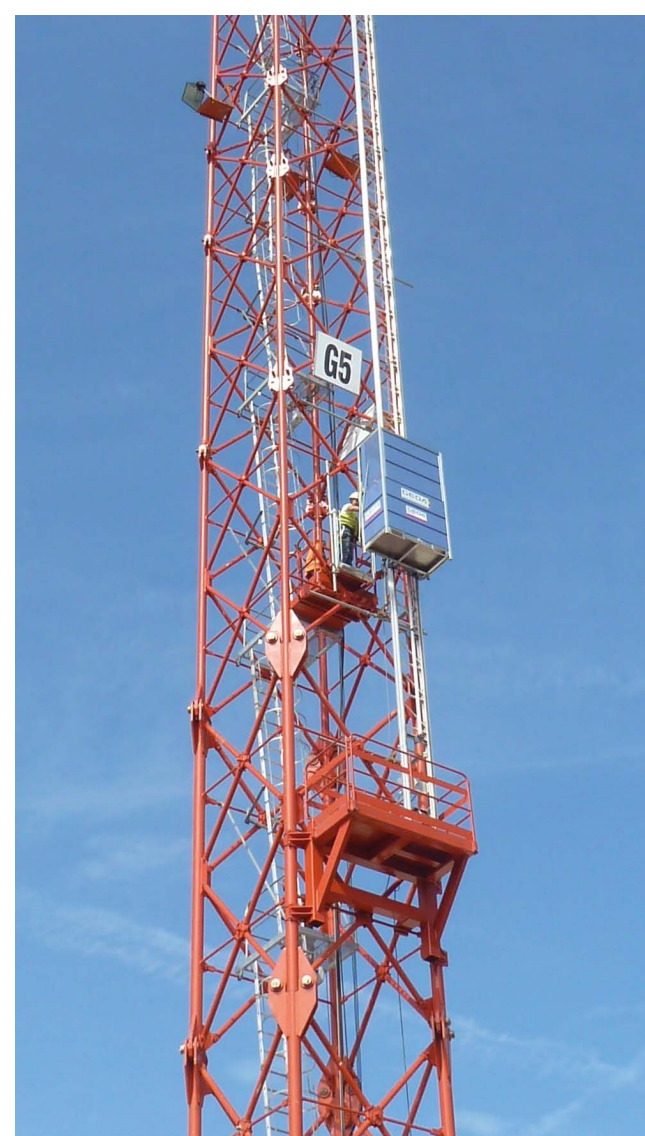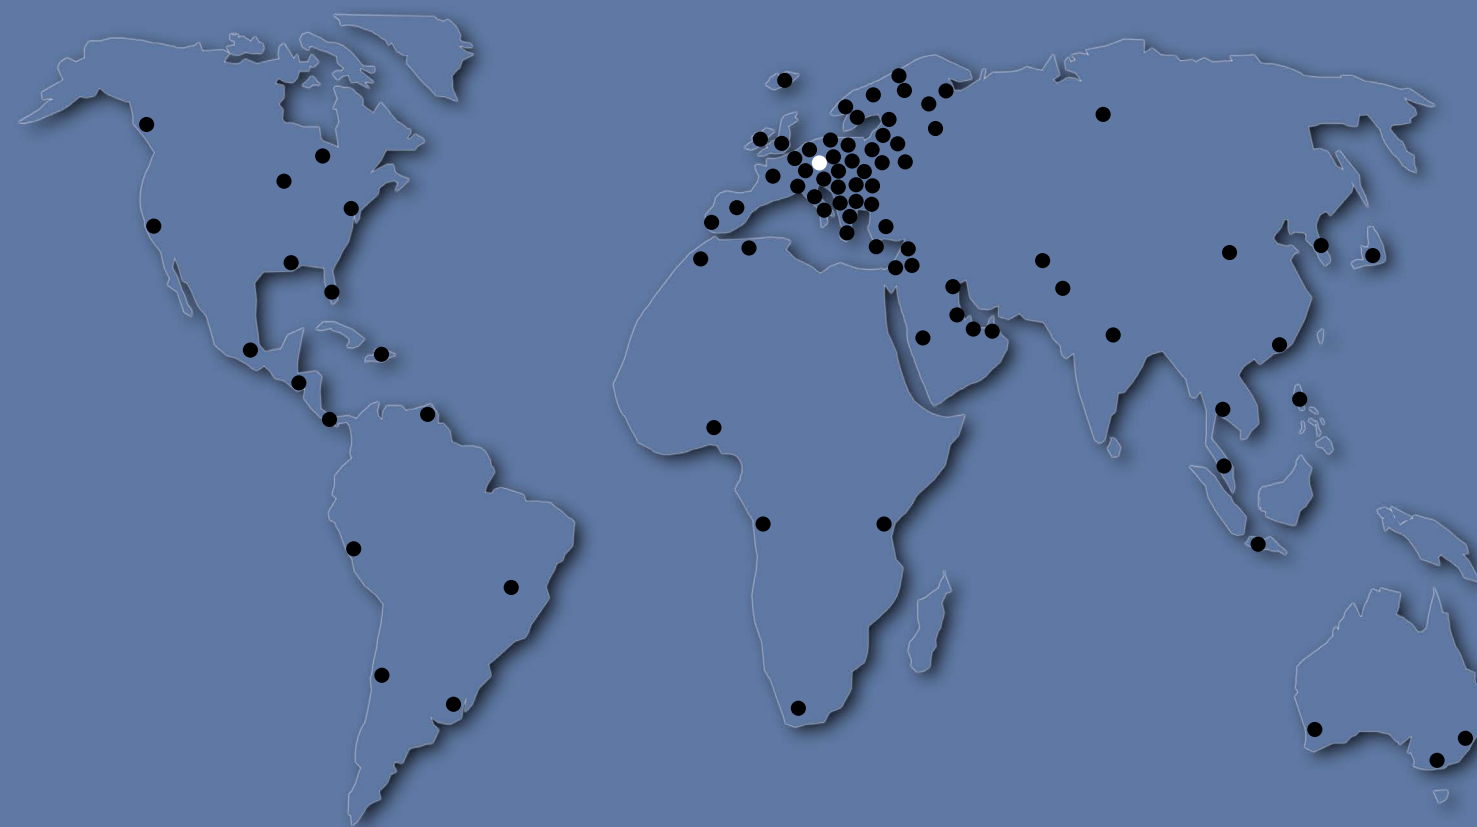

GEDA®
CRANE OPERATOR HOIST
2 PK

Your dealer:

GEDA®
ORIGINAL

**GEDA-Dechentreiter
GmbH & Co.KG**

Mertinger Straße 60
86663 Asbach-Bäumenheim
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
info@geda.de
www.geda.de

GEDA®

Safe and fast hoist for crane operating personnel.



Modular components for safe and quick assembly

- 1 Hoist cage with transition ramp
- 2 Safe putting on of the lightweight ladder sections (22 kg) through the opened roof
- 3 Easy assembly thanks to the patented quick locking system
- 3 Integrated cable channel for guiding the trailing cable without any problems
- 4 Special anchorings for the rails to be installed tension-free to the crane mast
- 5 Base unit consisting of over speed safety device and cable bin for an assembly height of 60 m. Option: cable bin for an assembly height of 120 m (higher heights on request)

Professional functionality – examined safety

- ▷ Over speed safety device guarantees more safety
- ▷ Electrical security elements prevent improper operation
- ▷ Option: choose between control unit in the hoist cage or on the entrance/exit
- ▷ Safe transition thanks to the lateral protection and the barrier



The **GEDA 2 PK** is an individually applicable rack and pinion hoist with aluminium ladder sections. It is able to transport the crane operator to his working place in very short time.

Its big advantage: concentrated working from the beginning regardless of meteorological conditions and motivation. The GEDA 2 PK meets the requirements of the European Machinery Directive.

You can use the **GEDA 2 PK** for all types of cranes of the different manufacturers.



GEDA®

**CRANE OPERATOR HOIST
2 PK**

Load capacity **200 kg/2 persons**

Drive **1.5 kW/400 V/50 Hz**

Lifting speed **24 m/min**

Lift cage **0.6 x 1.1 x 1.8 m**

Lifting height **max. 120 m**

NEW!
Lifting height **150 m!**

CE

GEDA®
ORIGINAL