



**STANDARD**  
ACCESS

**RAXTAR**


**RX2032HF**

36m/min




# RX2032HF


Passenger and Material Hoist  
(Single Configuration)

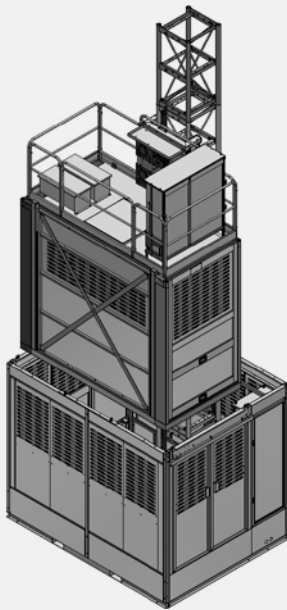


O V E R V I E W

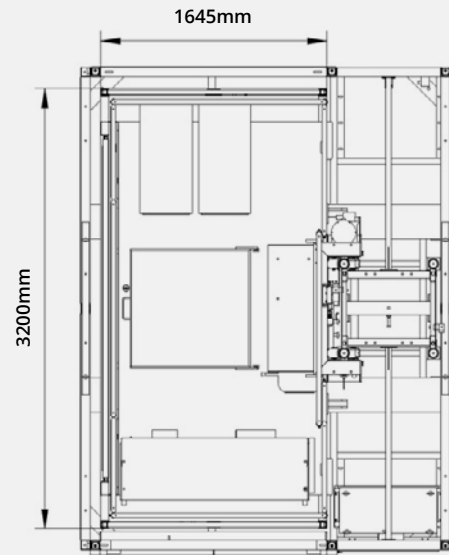

T O P   V I E W

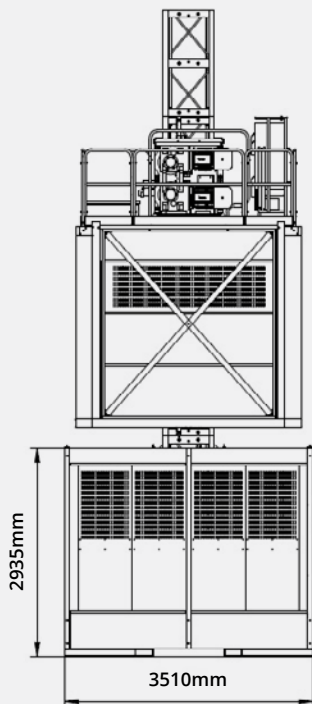


S I D E   V I E W

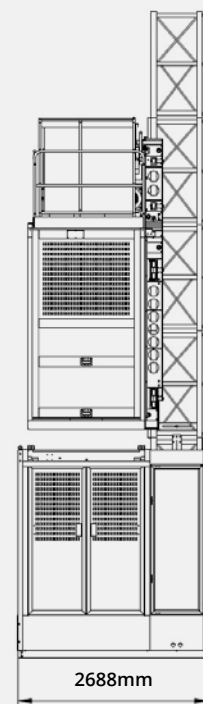


F R O N T   V I E W

# RX2032HFT


Passenger and Material Hoist  
(Twin Configuration)

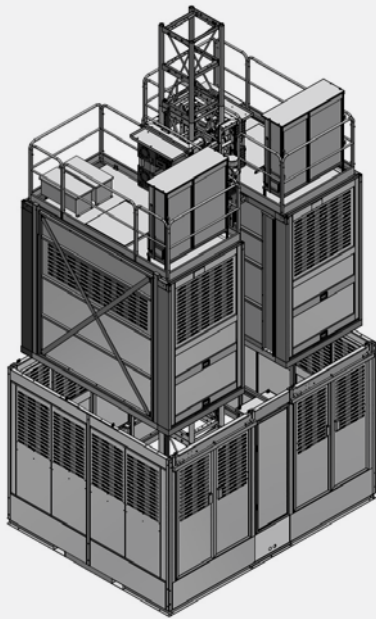


OVERVIEW

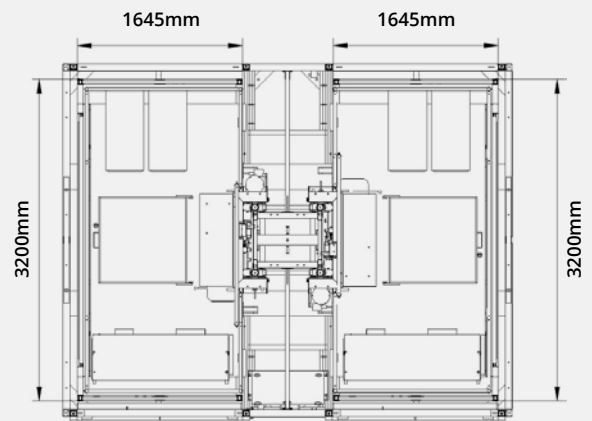

TOP VIEW

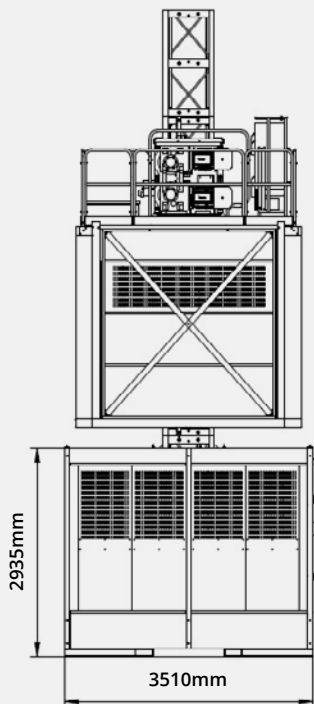

SIDE VIEW

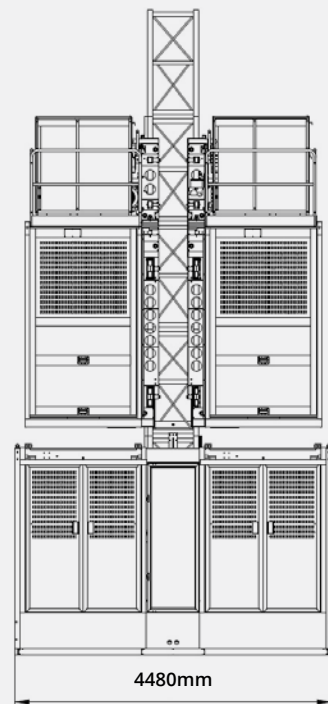

FRONT VIEW

# **RAXTAR**

**RAXTAR** of the Netherlands is a privately owned organisation that provides world class vertical access solutions: construction hoists for passengers & materials, material hoists, transport platforms and industrial lifts. RAXTAR builds on innovation & technology to deliver unequalled operational reliability at the lowest cost of ownership (TCO) in the market. RAXTAR is a synonym for meeting the highest-quality and safety standards.

## **Technical Data**

### **RX2032HF**

#### **CAPACITY**

|                        |              |
|------------------------|--------------|
| Payload                | 2000kg       |
| Lifting Speed          | 0 - 72 m/min |
| Counter Weight         | No           |
| Maximum Lifting Height | 200m         |

#### **ELECTRICAL DATA**

|                                 |                    |
|---------------------------------|--------------------|
| Motor                           | 2x 15 kW           |
| Power Supply                    | 400 V – 50 hz, 3p  |
| 110 V / 230 V power on platform | Standard, included |
| Overload device                 | Standard, included |
| Automatic lubrication           | Optional           |

#### **DIMENSIONS & WEIGHT**

|   |                      |
|---|----------------------|
| Hoist Car internal dimensions (L x W x H) | 3.10 x 1.52 x 2.60 m |
| Ground enclosure (L x W x H)              | 3.51 x 2.69 x 2.94 m |
| Length Mast section                       | 1.51m                |
| Weight mast section, single rack          | 120kg                |
| Weight mast section, double rack          | 150kg                |

#### **HOIST CONTROLS**

|   |                               |
|---|-------------------------------|
| Controls                                | Frequency control / SNL / PLC |
| User Interface                          | Joystick / touch panel        |
| Bluetooth communication                 | Optional                      |
| Manual controls / erection controls     | Standard, included            |
| Drop test controls                      | Standard, included            |
| Programmable landings                   | Optional                      |
| Hoist calling system                    | Optional                      |
| RX Control, internet management control | Optional                      |

#### **GENERAL**

|                                    |   |
|------------------------------------|---|
| Finishing Cabin / Ground Enclosure | Galvanised / Powder Coated                        |
| Company Logo & Colour              | Optional  |
| Ground Enclosure                   | Standard, included                                |
| C-Door                             | Optional  |
| Cable Trolley System               | Standard, included                                |
| Erection Jib                       | Optional  |
| Norms & Regulations                | Machine Directive (EN12159+A1) / A10.4:2007 (USA) |

\*Data based on a standard configuration