








## **RX2745FL - The Bear II**

Wide Body Passenger and Material Hoist (Single Configuration)



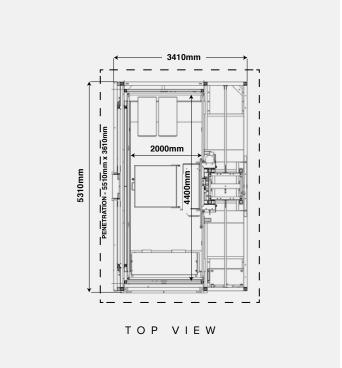

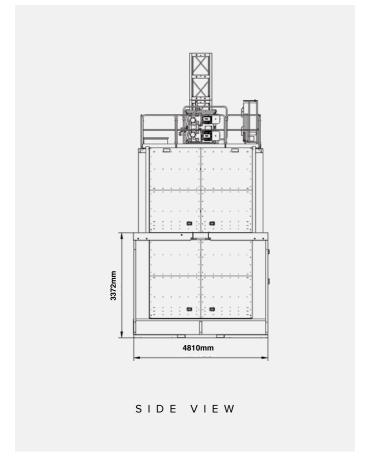


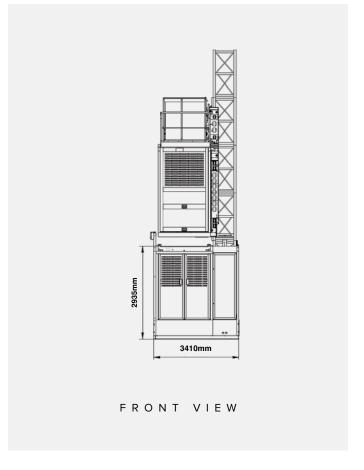



# **RX2745FL - The Bear II**

Wide Body Passenger and Material Hoist (Twin Configuration)



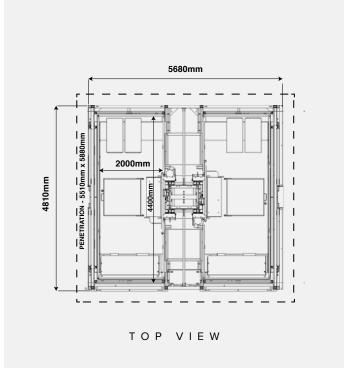

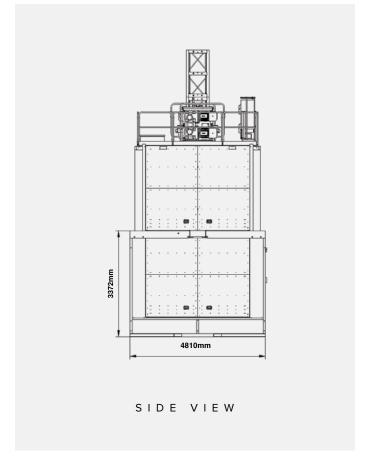

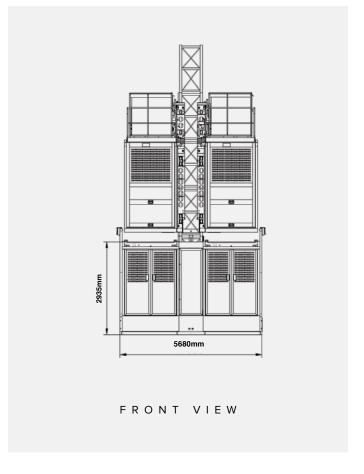

## RAXTAR

**RAXTAR** of the Netherlands is a privately owned organisation that provides world class vertical access solutions: construction hoists for passengers & materials, material hoists, transport platforms and industrial lifts. RAXTAR builds on innovation & technology to deliver unequalled operational reliability at the lowest cost of ownership (TCO) in the market. RAXTAR is a synonym for meeting the highest-quality and safety standards.



### RX2745FL - The Bear II

CAPACITY 72m/min 2700kg Payload Lifting Speed 0 - 72 m/min Counter Weight No

#### **DIMENSIONS & WEIGHT**

Maximum Lifting Height

Hoist Car internal dimensions (L x W x H) 4.40 x 2.00 x 2.60 m Ground enclosure (L x W x H) 4.81 x 3.41 x 2.94 m

300m

Length Mast section 1.51m Weight mast section, single rack 120kg Weight mast section, double rack 150kg

#### **ELECTRICAL DATA**

Motor 2 x 30kw

400 V – 50 hz, 3p Power Supply 110 V / 230 V power on platform Standard, included Standard, included Overload device

Automatic lubrication Optional

#### HOIST CONTROLS

Controls Frequency control / SNL / PLC

User Interface Joystick / touch panel

Bluetooth communication Optional

Manual controls / erection controls Standard, included Standard, included Drop test controls

Programmable landings Optional Hoist calling system Optional RX Control, internet management control Optional

#### GENERAL

Finishing Cabin / Ground Enclosure Galvanised / Powder Coated

Company Logo & Colour Optional

Ground Enclosure Standard, included

C-Door Optional

Cable Trolley System Standard, included

**Erection Jib** Optional

Norms & Regulations Machine Directive (EN121159+A1) /

A10.4:2007 (USA) /









43 Dunmore Drive

<sup>\*</sup>Data based on a standard configuration