



STANDARD
ACCESS

RAXTAR


RX4050FL - Wide Loader

0-36m/min




RX4050FL - Wide Loader


Passenger and Material Hoist
(Single Configuration)

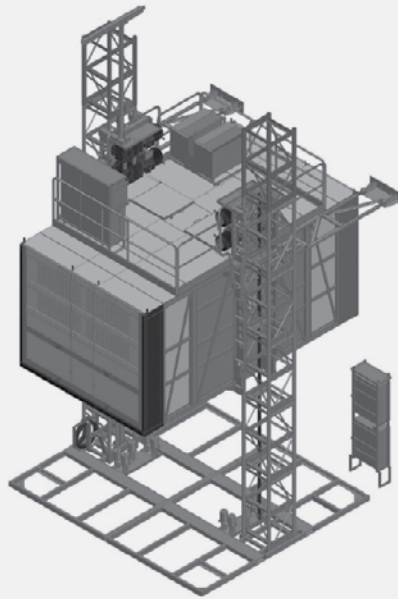

O V E R V I E W

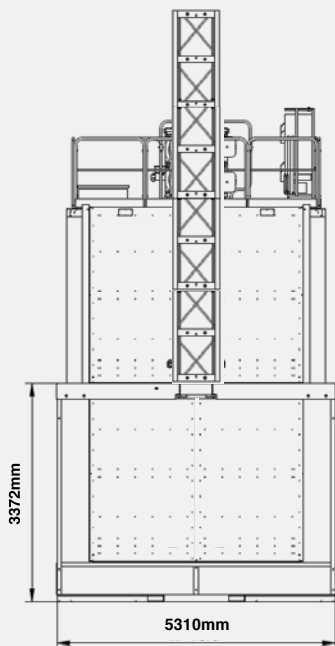


S I D E V I E W

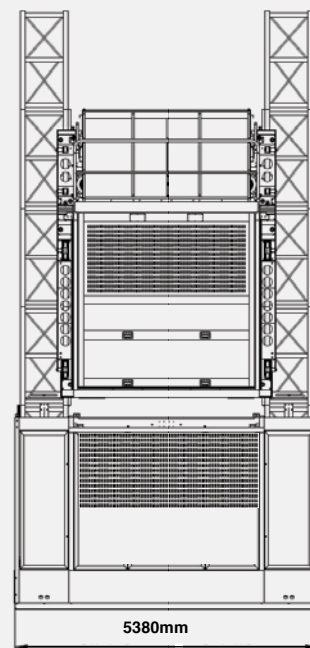

F R O N T V I E W

RX4050FL - Wide Loader

Passenger and Material Hoist
(Single Configuration)

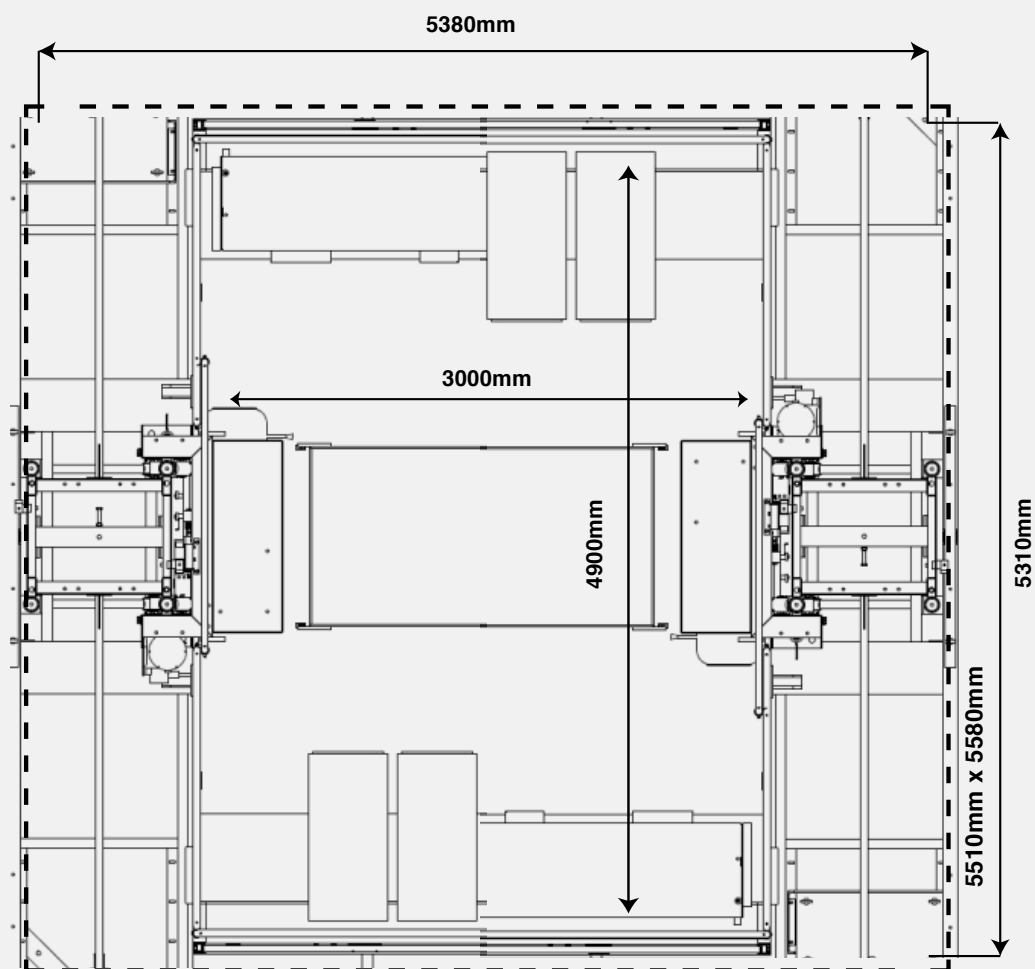

T O P V I E W

RAXTAR

RAXTAR of the Netherlands is a privately owned organisation that provides world class vertical access solutions: construction hoists for passengers & materials, material hoists, transport platforms and industrial lifts. RAXTAR builds on innovation & technology to deliver unequalled operational reliability at the lowest cost of ownership (TCO) in the market. RAXTAR is a synonym for meeting the highest-quality and safety standards.

Technical Data

RX4050FL - Wide Loader

CAPACITY

Payload	36m/min 4000kg
Lifting Speed	0 - 36 m/min passengers
Counter Weight	No
Maximum Lifting Height	425m

DIMENSIONS & WEIGHT

Hoist Car internal dimensions (L x W x H)	4.90 x 3.00 x 2.60m
Ground Enclosure (L x W x H)	5.31 x 5.38 x 2.94m
Length mast section	1.51m
Max height freestanding	n.a.
Weight mast section	120kg

ELECTRICAL DATA

Motor	4 x 11kw
Power Supply	400v - 50hz, 3p
110 V / 230 V power on platform	Standard, included
Overload device	Standard, included
Automatic lubrication	Optional

HOIST CONTROLS

Controls	SNL / PLC
User Interface	Touch panel
Bluetooth communication	Optional
Manual controls / erection controls	Standard, included
Drop test controls	Standard, included
Programmable landings	Optional
Hoist calling system	Optional
RX Control, internet management control	Optional

GENERAL

Finishing Cabin / Ground Enclosure	Galvanised / Powder Coated
Ground Enclosure	Standard, included
Cable Trolley System	Standard, included
Norms & Regulations	Machine Directive (EN121159+A1) / A10.4:2007 (USA) / CSA Z185

*Data based on a standard configuration