



STANDARD
ACCESS

SCANCLIMBER®




SC3232F

0-54m/min




SC3232F

Passenger & Material Hoist
(Single Configuration)

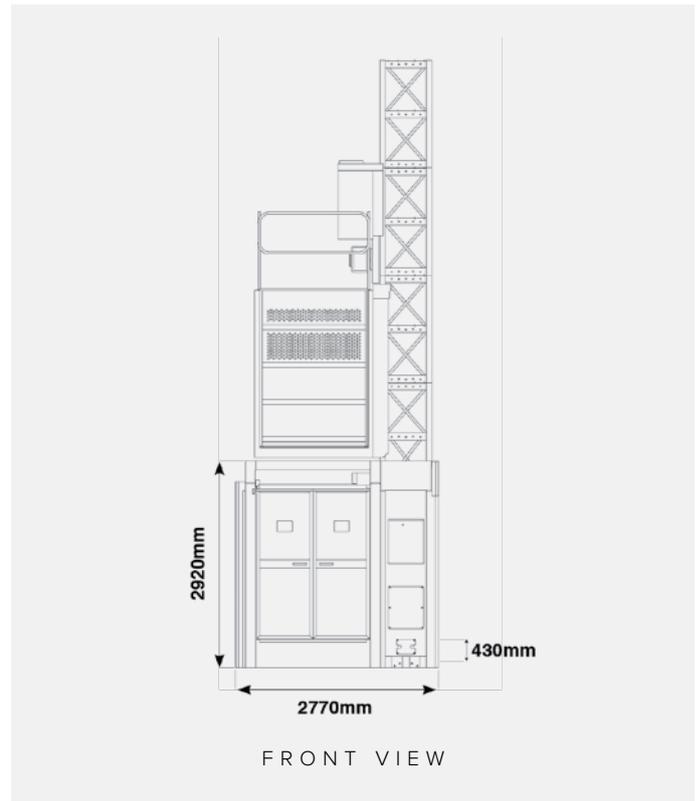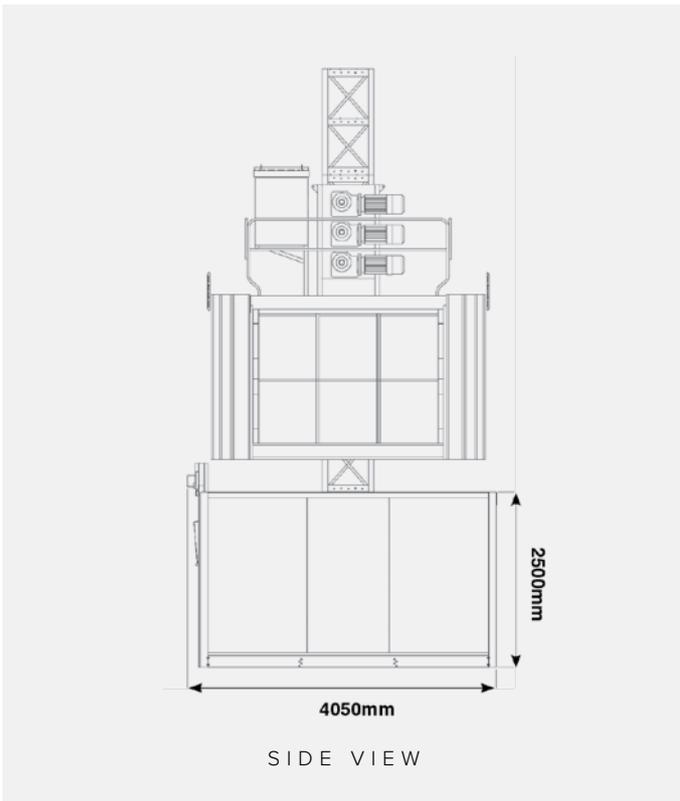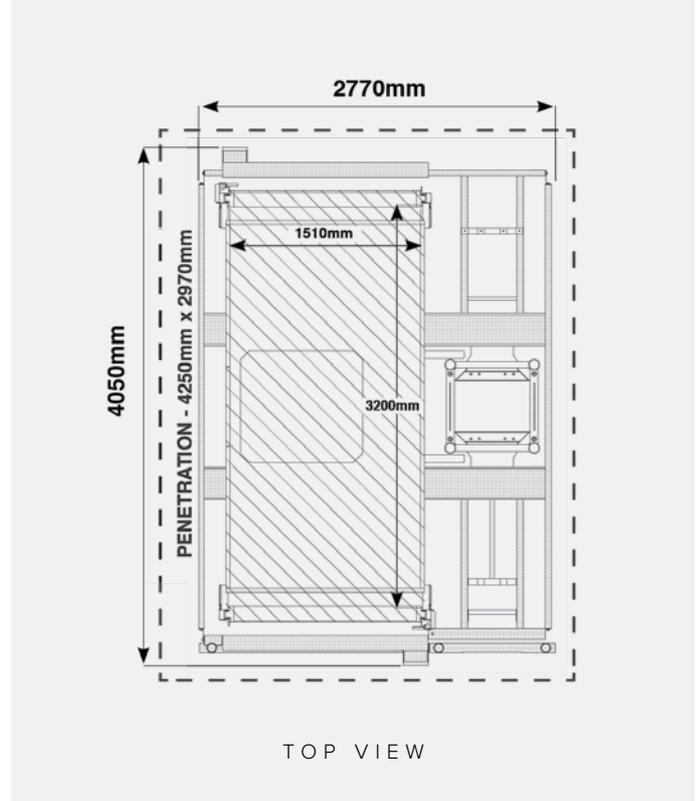


SC3232F


Passenger & Material Hoist
(Twin Configuration)

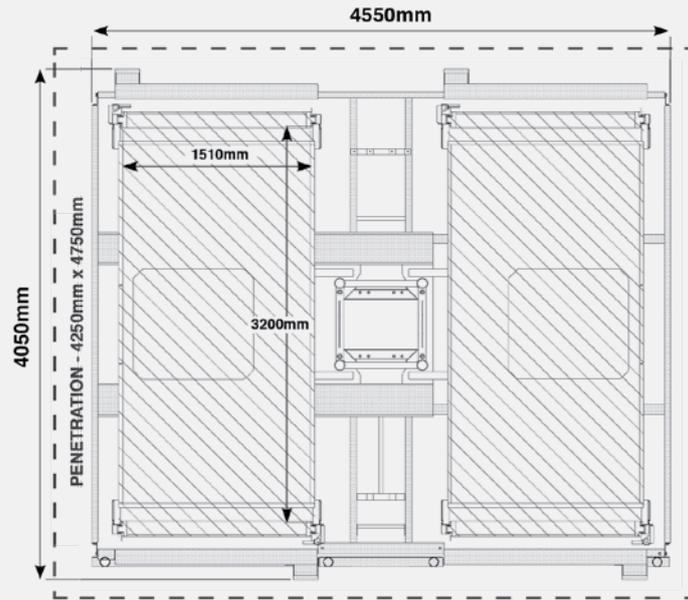

TOP VIEW

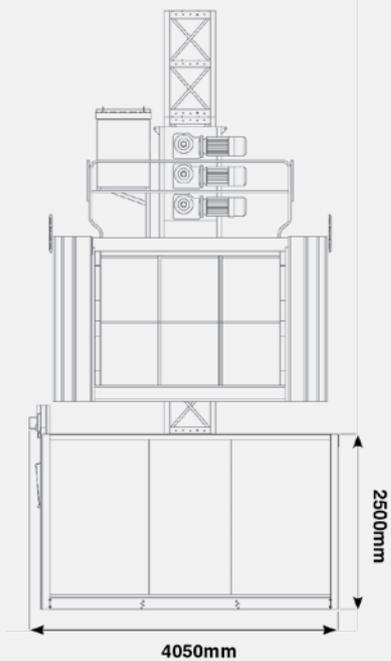

SIDE VIEW

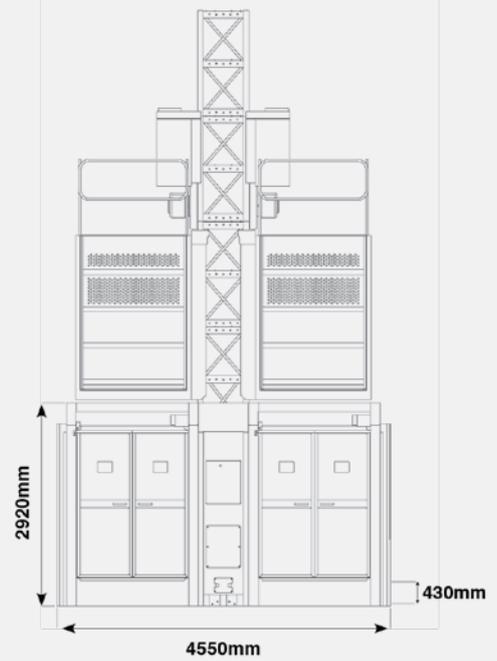

FRONT VIEW

SCANCLIMBER®

SCANCLIMBER is the world's technology leader in mast climbing equipment for both temporary and permanent installations. The company has its corporate head office in Pirkkala, Finland and manufacturing in Gniezno, Poland. The company employs more than 200 staff in Europe and Asia. Scanclimber creates value for its customers with high quality, reliable and flexible vertical access solutions.

Technical Data

SC3232F

CAPACITY

	54m/min	90m/min
Payload	3200kg	3200kg
Lifting Speed	0 -54 m/min	0 -90 m/min
Counter Weight	No	No
Maximum Lifting Height	300m	300m

ELECTRICAL DATA

Moto	3 x 11kw	3 x 18.5kw
Power Supply	400V - 50hz, 3p	400V - 50hz, 3p
110 V / 240 V power on platform	Standard, included	Standard, included
Overload device	Standard, included	Standard, included
Automatic lubrication	N/A	N/A

DIMENSIONS & WEIGHT

Hoist Car internal dimensions (L x W x H)	3.20 x 1.51 x 2.05m
Length Mast section	1.5m
Weight mast section - Single	138kg
Weight mast section -Double	154kg

HOIST CONTROLS

Controls	Frequency Control
User Interface	Touch Panel / Joy Stick
Bluetooth communication	N/A
Manual controls / erection controls	Standard, included
Drop test controls	Standard, included
Programmable landings	Optional
Hoist calling system	Optional
SR Control, internet management control	N/A

GENERAL

Finishing Cabin / Ground Enclosure	Powder Coated
Company Logo & Colour	Optional
Ground Enclosure	Standard, included
C-Door	Optional
Cable Trolley System	Optional
Erection Jib	Optional
Norms & Regulations	Machine Directive (EN121159+A1) / A10.4:2007 (USA) / CSA Z185

*Data based on a standard configuration