



**STANDARD**  
ACCESS

**RAXTAR**


**RX2745FL**

72-92m/min




# RX2745FL


Passenger and Material Hoist  
(Single Configuration)

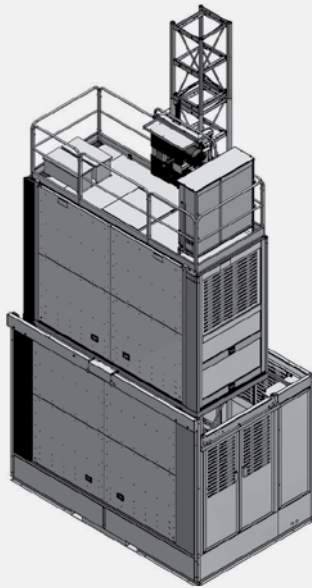


O V E R V I E W

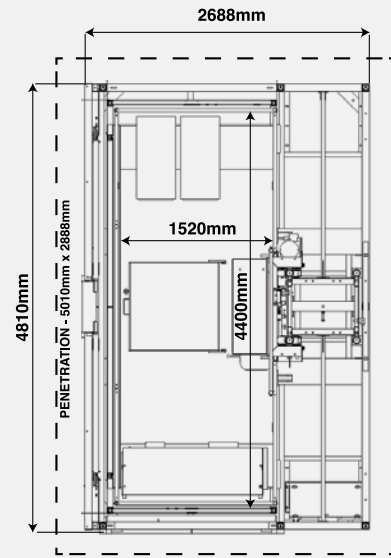

T O P   V I E W

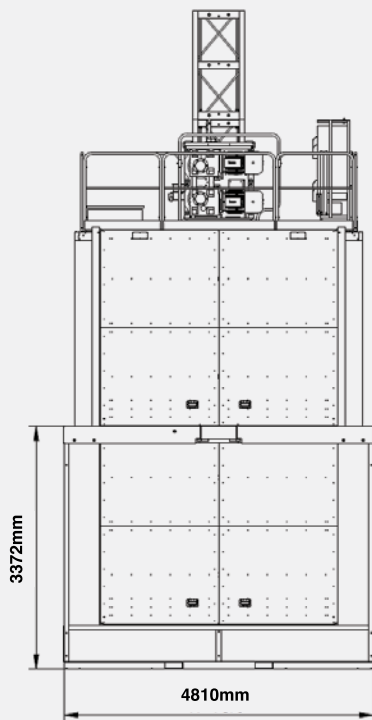


S I D E   V I E W

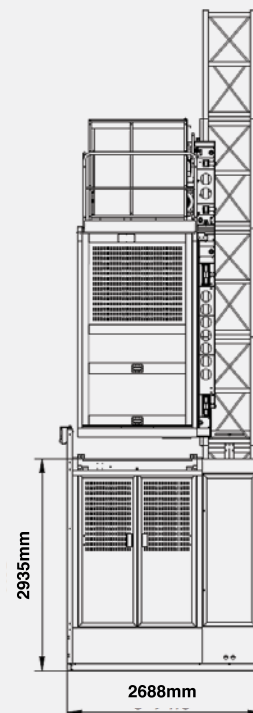


F R O N T   V I E W

# RX2745FL


Passenger and Material Hoist  
(Single Configuration)

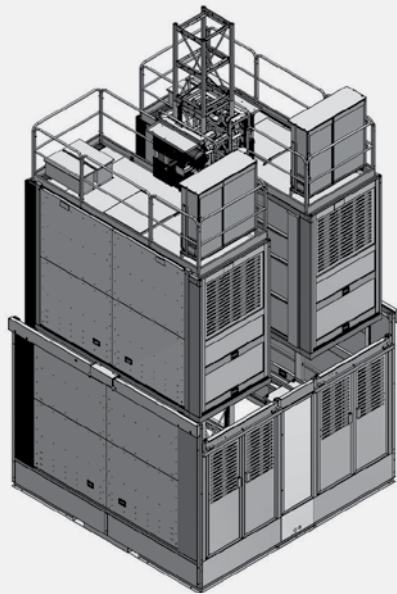


O V E R V I E W

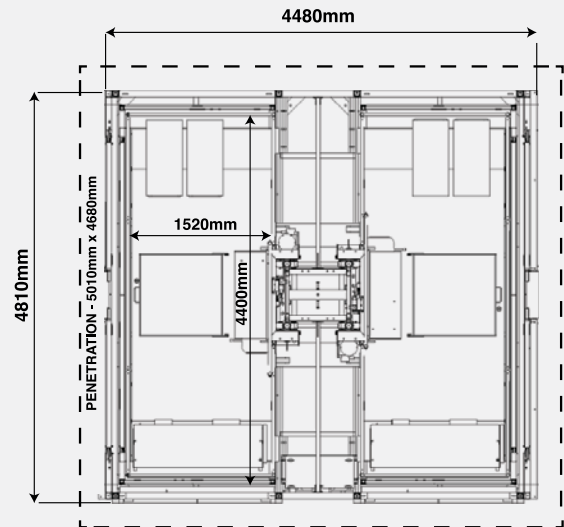

T O P   V I E W

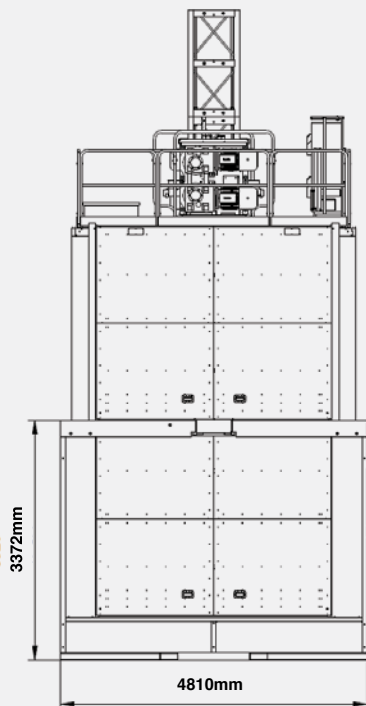

S I D E   V I E W

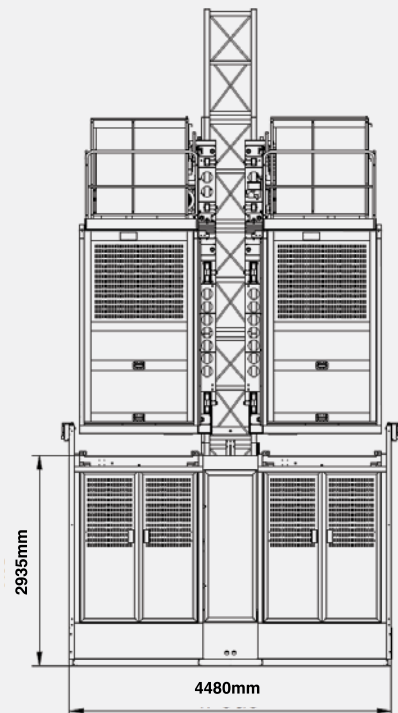

F R O N T   V I E W

# **RAXTAR**

**RAXTAR** of the Netherlands is a privately owned organisation that provides world class vertical access solutions: construction hoists for passengers & materials, material hoists, transport platforms and industrial lifts. RAXTAR builds on innovation & technology to deliver unequalled operational reliability at the lowest cost of ownership (TCO) in the market. RAXTAR is a synonym for meeting the highest-quality and safety standards.

## **Technical Data**

### **RX2745FL**

#### **CAPACITY**

Payload	<b>72m/min</b> 2700kg	<b>92m/min</b> 2700kg
Lifting Speed	0 - 72 m/min	0 - 92 m/min
Counter Weight	No	No
Maximum Lifting Height	300m	300m

#### **ELECTRICAL DATA**

Motor	2 x 22kw	3 x 18kw
Power Supply	400v - 50hz, 3p	400v - 50hz, 3p
110 V / 230 V power on platform	Standard, included	Standard, included
Overload device	Standard, included	Standard, included
Automatic lubrication	Optional	Optional

#### **DIMENSIONS & WEIGHT**

Hoist Car internal dimensions (L x W x H)	4.40 x 1.52 x 2.60m
Ground enclosure (L x W x H)	4.81 x 2.69 x 2.94m
Length Mast section	1.51m
Weight mast section, single rack	120kg
Weight mast section, double rack	150kg

#### **HOIST CONTROLS**

Controls	Frequency control / SNL / PLC
User Interface	Joystick / touch panel
Bluetooth communication	Optional
Manual controls / erection controls	Standard, included
Drop test controls	Standard, included
Programmable landings	Optional
Hoist calling system	Optional
RX Control, internet management control	Optional

#### **GENERAL**

Finishing Cabin / Ground Enclosure	Galvanised / Powder Coated
Company Logo & Colour	Optional
Ground Enclosure	Standard, included
C-Door	Optional
Cable Trolley System	Standard, included
Erection Jib	Optional
Norms & Regulations	Machine Directive (EN121159+A1) / A10.4:2007 (USA) / CSA Z185

\*Data based on a standard configuration