

RAXTAR RX 4050 FL - MAMMOTH


Materials Hoist
0-36m/min




RAXTAR of the Netherlands is a privately owned organisation that provides world class vertical access solutions: construction hoists for passengers & materials, material hoists, transport platforms and industrial lifts. RAXTAR builds on innovation & technology to deliver unequalled operational reliability at the lowest cost of ownership (TCO) in the market. RAXTAR is a synonym for meeting the highest-quality and safety standards.

RX 4050 FL - MAMMOTH


Passenger & Material Hoist (Single Configuration)

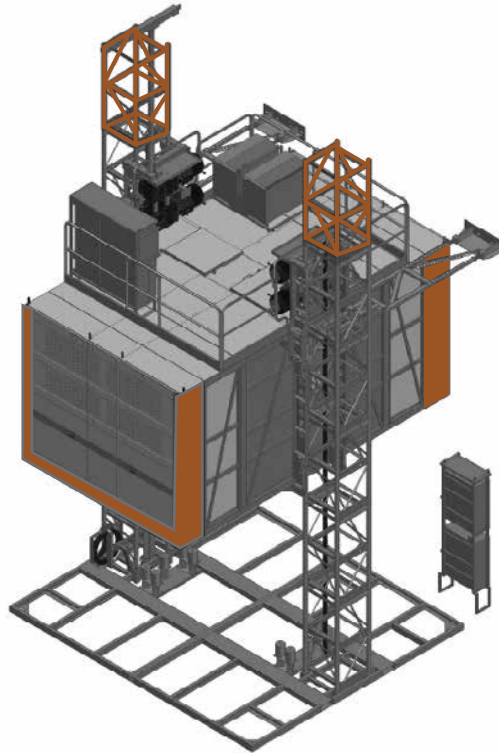

OVERVIEW

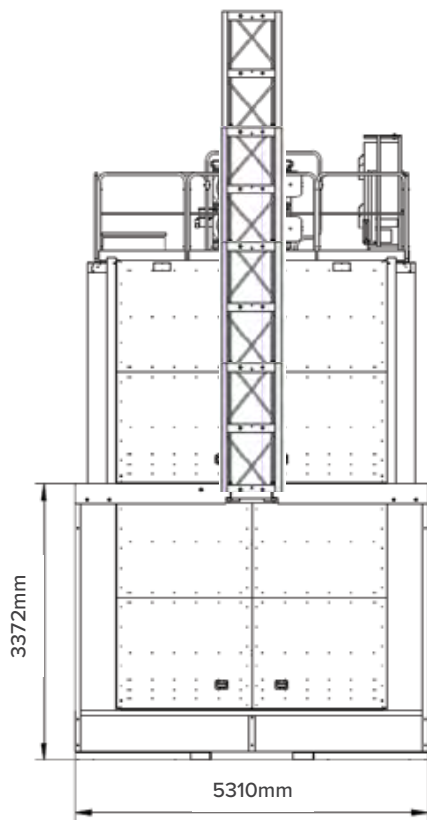


SIDE VIEW

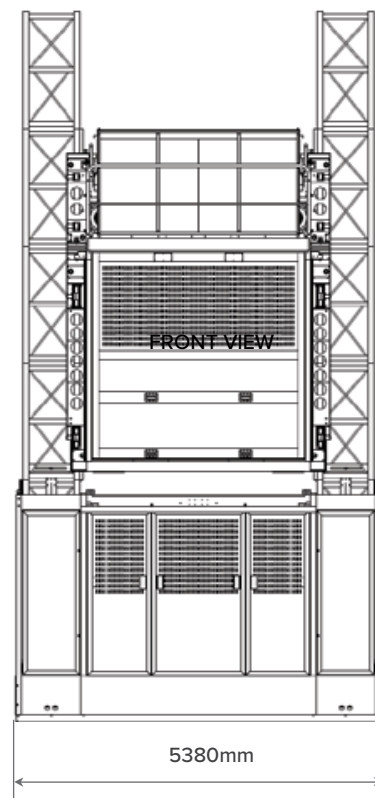

FRONT VIEW

RX 4050 FL - MAMMOTH

Passenger & Material Hoist (Twin Configuration)

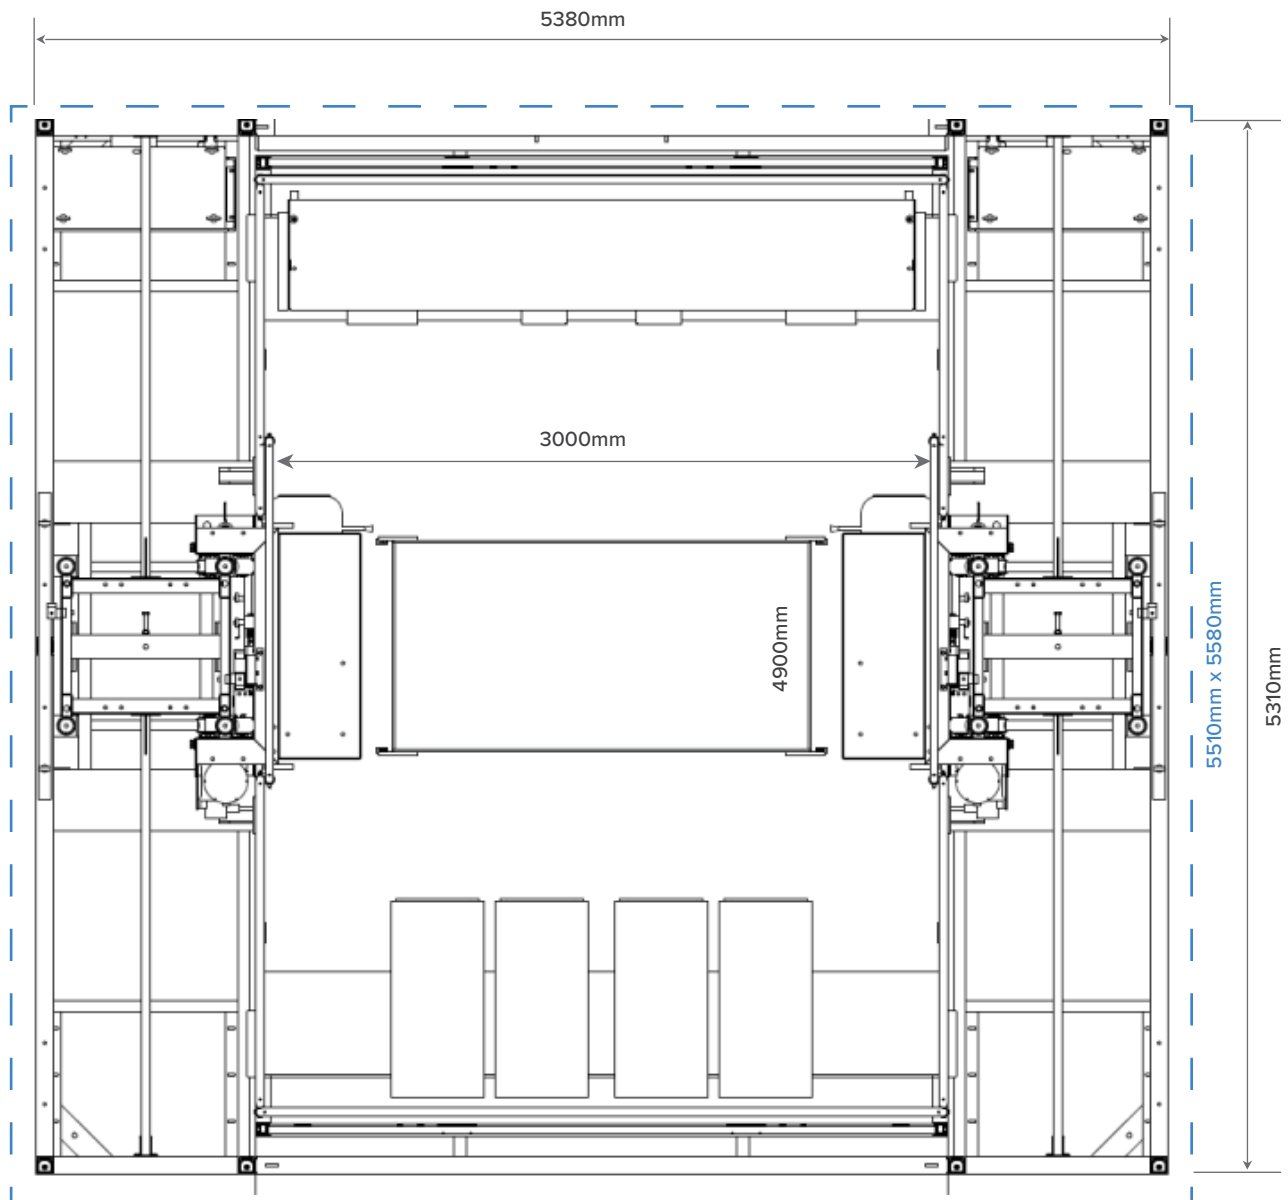

TOP VIEW

TECHNICAL DATA

RX 4050 FL - MAMMOTH

CAPACITY

	36m/min
Payload	4000 kg
Lifting Speed	0 - 36 m/min passengers
Counter Weight	No
Maximum Lifting Height	425 m

DIMENSIONS & WEIGHT

Hoist Car Internal Dimensions (L x W x H)	4.90 x 3.00 x 2.60 m
Ground Enclosure (L x W x H)	5.31 x 5.38 x 2.94 m
Length Mast Section	1.51 m
Max Height Freestanding	n.a.
Weight Mast Section	120 kg

ELECTRICAL DATA

Motor	4 x 11 kw
Power Supply	400 V - 50 Hz, 3p
110 V / 230 V Power on Platform	Standard, Included
Overload Device	Standard, Included
Automatic Lubrication	Optional

HOIST CONTROLS

Controls	SNL / PLC
User Interface	Touch Panel
Bluetooth Communication	Optional
Manual Controls / Erection Controls	Standard, Included
Drop Test Controls	Standard, Included
Programmable Landings	Optional
Hoist Calling System	Optional
RX Control, Internet Management Control	Optional

GENERAL

Finishing Cabin / Ground Enclosure	Galvanised / Powder Coated
Ground Enclosure	Standard, Included
Cable Trolley System	Standard, Included
Norms & Regulations	Machine Directive (EN 121159+A1) / A 10.4:2007 (USA) CSA Z185

*Data based on a standard configuration