



STANDARD
ACCESS

RAXTAR


RX2550FL - The Beast

0-92m/min




RX5560FL - The Beast


Passenger and Material Hoist
(Single Configuration)

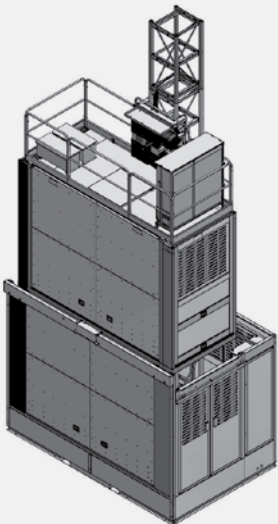

O V E R V I E W

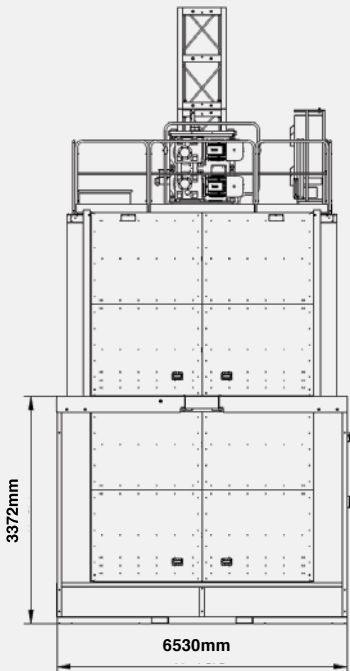


S I D E V I E W

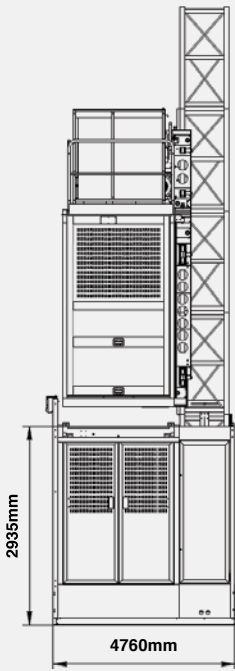

F R O N T V I E W

RX5560FL - The Beast

Passenger and Material Hoist
(Single Configuration)

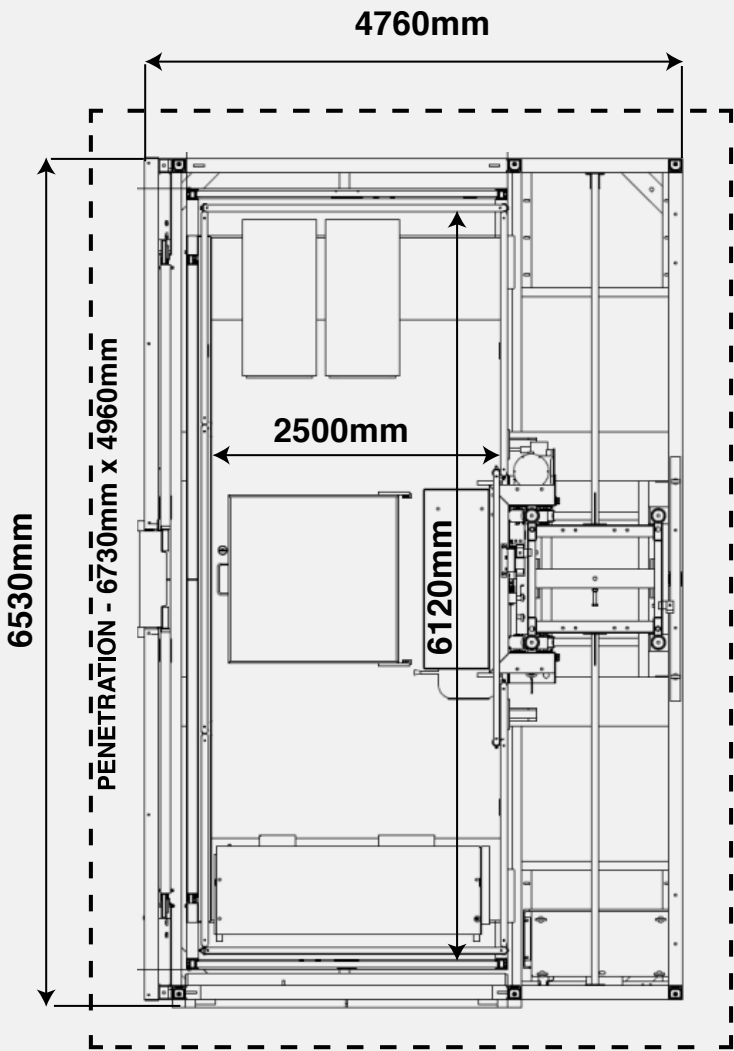

T O P V I E W

RAXTAR

RAXTAR of the Netherlands is a privately owned organisation that provides world class vertical access solutions: construction hoists for passengers & materials, material hoists, transport platforms and industrial lifts. RAXTAR builds on innovation & technology to deliver unequalled operational reliability at the lowest cost of ownership (TCO) in the market. RAXTAR is a synonym for meeting the highest-quality and safety standards.

Technical Data

RX5560FL - The Beast

CAPACITY

Payload	5500kg
Lifting Speed	0 - 92 m/min
Counter Weight	Yes
Maximum Lifting Height	600m

ELECTRICAL DATA

Motor	3 x 22kw
Power Supply	400v - 50hz, 3p
110 V / 230 V power on platform	Standard, included
Overload device	Standard, included
Automatic lubrication	Optional

DIMENSIONS & WEIGHT

Hoist Car internal dimensions (L x W x H)	6.12 x 2.5 x 2.60m
Ground enclosure (L x W x H)	6.53 x 4.76 x 2.94m
Length Mast section	1.51m
Weight mast section, single rack	150kg

HOIST CONTROLS

Controls	Frequency control / SNL / PLC
User Interface	Joystick / touch panel
Bluetooth communication	Optional
Manual controls / erection controls	Standard, included
Drop test controls	Standard, included
Programmable landings	Optional
Hoist calling system	Optional
RX Control, internet management control	Optional

GENERAL

Finishing Cabin / Ground Enclosure	Galvanised / Powder Coated
Company Logo & Colour	Optional
Ground Enclosure	Standard, included
C-Door	Optional
Cable Trolley System	Standard, included
Erection Jib	Optional
Norms & Regulations	Machine Directive (EN121159+A1) / A10.4:2007 (USA) / CSA Z185

*Data based on a standard configuration